


# Reader GP20

## Data Sheet Rev 1.43

The GP20 is a very high performance proximity reader featuring long range and small dimensions. The unit will run from any voltage from 5 to 13.5vdc. The GP20 features high read range at voltages as low as 5 volts making it ideally suited to a wide variety of applications, particularly access control.

<b>Power Requirements</b>	5-13.5 volt regulated DC. at 65 mA typical with a 12v supply. A linear regulator is recommended.
<b>Interface</b>	Wiegand, Magstripe, 9.6K Baud Serial ASCII (RS232) or special to customer specifications.
<b>Typical Maximum Read in ideal conditions</b>	Range 22cm at 13.5v and 13 cm at 5v with ISO card
<b>Frequency</b>	125KHz standard or 134.2KHz to special order.
<b>Transponder</b>	Read Only.
<b>Audio/Visual Indication</b>	Internal LED and Buzzer
<b>Dimensions</b>	7.8 x 4.3 x 1.5 cm
<b>Temperature Range</b>	-10 to 60 Deg C.
<b>Interface Cable</b>	90cm.

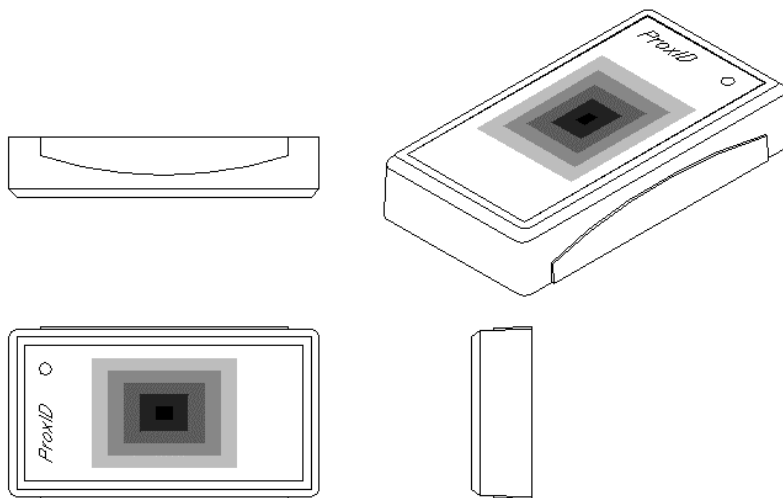

### Output Assignment

Red	Power 5 - 13.5 Volt, 65mA typical with a 12V supply
Black	Power 0 Volt
White	Clock Output (Magstripe , Wiegand1) with internal 4K7 pull up
Green	Data Output (RS232, Magstripe & Wiegand0) with internal 4K7 pull up
Orange	Card Present Output 4K7 with internal 4K7 pull up
Yellow	Program Input
Blue	NC
Brown	NC

## Output Format

The output format can be customer programmed. The available formats are Wiegand, Magnetic Emulation, Clock Data and Serial ASCII (RS232)

<b>Wiegand</b>		<b>Magstripe</b>	
Red	Power +V	Red	Power +V
Black	Ground 0v	Black	Ground 0v
White	Data1	Green	Data
Green	Data0	White	Clock(Strobe)
Yellow	connect to White (Data0, Clock output)	Orange	Card Present
		Yellow	Connect to Orange

### **Serial ASCII (RS232)**

Red	Power +V
Black	Ground 0v
Green	Tx Data
Yellow	No connection

## Data Structure (Serial ASCII)

Baud Rate: 9600, N, 8,1

STX(02 HEX)	DATA	CR	LF	ETX (03 HEX)
-------------	------	----	----	--------------

The start character is factory defined as an 'STX' (02 HEX). The CR\LF characters serve to bring the received screen text back to the left hand side and on the line below after the data bytes have been sent. The 'ETX ' (03 HEX) character denotes the end of the current transmission.

## Data Structure (Magstripe emulation, ABA Track 2)

Speed : Simulated to 40 IPS (Inch per second)

10 LEADING ZEROS	SS	DATA	ES	LRC	10 TRAILING ZEROS
------------------	----	------	----	-----	-------------------

The leading zeros prepare the receiving unit to accept the data. SS is the Start Sentinel consisting of 11010. ES is the End Sentinel consisting of 11111. LRC is the Longitudinal Redundancy Check character. Lastly there follows trailing zeros.

## **PROGRAMMING THE OUTPUT FORMAT**

The programming input may be connected in the following ways to choose between the available output formats.

- |                          |                                       |
|--------------------------|---------------------------------------|
| 1) Serial ASCII          | Leave Program Input Open Circuit      |
| 2) Wiegand               | Connect Program Input to Clock Output |
| 3) Clock Data**          | Connect Program Input to Data Output  |
| 4) Magnetic Emulation    | Connect Program Input to Card Present |
| 5) Customer Interface ** | Connect to Zero Volts                 |

\*\* (to special order only)